

6 Using the Data Editor

The Data Editor

The Data Editor gives a spreadsheet-like view of data that are currently in memory. You can use it to enter new data, edit existing data, search through the dataset, and edit attributes of the data in the dataset, such as variable names, labels, and display formats, as well as value labels.

In addition to the view of the data, there are two windows for manipulating variables and their properties: the Variables window and the Properties window. These are similar to the same-named windows in the main Stata window.

Stata supports multiple datasets in memory via [data frames](#). By default, when you start a Stata session, you are working in a frame named `default`. Any dataset you open will, by default, be placed in this frame. But you can create a second frame, named, for example, `cars`, to load the example dataset `auto.dta` and a third frame to load `nhanes2.dta` and so on. In [StataNow](#), you can view and edit multiple frames in the Data Editor. On the right side of the Data Editor, you will see the Frames window, which lists the frames in memory; a solid dot (●) is placed next to the current working frame. The following discussion assumes that you are working in the `default` frame, the current working, and only, frame. For details on working with multiple frames in the Data Editor, see [Working with multiple frames](#) in [\[GSM\] 6 Using the Data Editor](#) below.

Any action you take in the Data Editor results in a command being issued to Stata as though you had typed it into the Command window. This means that you can keep good records and learn commands by using the Data Editor.

The Data Editor can be kept open while you work in Stata, giving you a live view of your dataset as you work. To protect your data from inadvertent changes, the Data Editor has two modes: edit mode for active editing and browse mode for viewing. In browse mode, editing within the Data Editor window is disabled. We highly recommend that you use the Data Editor in browse mode and switch to edit mode only when you want to make changes.

You can print your data from the Data Editor by selecting **Print** from the **File** menu.

We will be entering and editing data in this chapter, as well as manipulating the variables by using the Variables and Properties windows, so start the Data Editor in edit mode by clicking on the **Data Editor** button, .

Buttons on the Data Editor

The toolbar for the Data Editor has some standard buttons and some buttons we have not yet seen:



Data Editor (Edit): Changes the Data Editor to edit mode.



Data Editor (Browse): Changes the Data Editor to browse mode for safely looking at data.



Save: Saves the dataset visible in the Data Editor.



Find: Toggles the Find bar for searching in the Data Editor.



Menu: Displays menu items that are specific to the Data Editor; this feature is part of [StataNow](#).



Sidebar: Opens the sidebar in the Data Editor; see below for details.

The sidebar in the Data Editor has buttons for changing what the sidebar shows. These are technically tabs, but because they look and act like buttons, we will call them buttons throughout.



Variables: Brings the *Frames*, *Variables*, and *Properties* windows to the front.



Snapshots: Brings the *Snapshots* window to the front. See [Working with snapshots](#) in [\[GSM\] 6 Using the Data Editor](#) below.



Filter: Brings the *Filter observations* window to the front. This window is useful for looking at a subset of the current dataset.

Navigation

You can move about in the Data Editor by using the typical methods:

- To move to the right, use the *Tab* key or the right arrow key.
- To move to the left, use *Shift-Tab* or the left arrow key.
- To move down, use *Return* or the down arrow key.
- To move up, use *Shift-Return* or the up arrow key.

You can also click within a cell to select it.

Contextual menu

Right-clicking within the Data Editor displays a contextual menu that allows you to manipulate the data and what you are viewing. The contextual menu includes many common tasks such as the following:

- **Copy** to copy data to the Clipboard.
- **Paste** to paste data from the Clipboard.
- **Paste special...** to paste data from the Clipboard with finer control of delimiters, giving a preview of what will be pasted.
- **Select all** to select all the data displayed in the Data Editor. This could be different from the data in the dataset if the data are filtered or some variables are hidden.
- **Data** to open a submenu containing
 - **Insert variable...** to bring up a dialog for creating a new variable at the current cursor position.
 - **Add variable...** to bring up a dialog for creating a new variable at the beginning or end of a dataset.
 - **Replace contents of variable...** to bring up a dialog for replacing the values of the selected variable.
 - **Insert observations...** to bring up a dialog for inserting new empty observations at the current cursor position.
 - **Add observations...** to bring up a dialog for adding new empty observations to the end of the dataset.

- **Sort data...** to sort the dataset by the selected variable.
- **Value labels** to access a submenu for managing value labels.
- **Keep only selected data** to keep only the selected data in the dataset. All remaining data will be dropped (removed) from the dataset. As always, this affects only the data in memory. It will not affect any data on disk.
- **Drop selected data** to drop the selected data. This is only possible if the selection consists of either entire variables (columns) or observations (rows).
- **Convert variables from string to numeric...** for converting string variables to numeric variables, which is useful when the string variables contain characters for formatting numbers instead of just numbers.
- **Convert variables from numeric to string...** for converting numeric variables to strings.
- **Encode string variable to labeled numeric...** for encoding a string-valued categorical variable to a numeric variable while still displaying the categories in tables and graphs.
- **Decode labeled numeric variable to string...** for turning an encoded variable back into a string variable.
- **Pin selected row or column** to pin rows or columns. If one or more columns and variables are selected, you will see **Pin selected variables**; if one or more rows and observations are selected, you will see **Pin selected observations**.
- **Reset selected column widths** to reset the selected columns to their default widths.
- **Hide selected variables** to hide the selected variables.
- **Show only selected variables** to hide all but the selected variables.
- **Show entire dataset** to turn off all filters and unhide all variables.
- **Preferences...** to set the preferences for the Data Editor.
- **Print...** to print the data.

Data entry

Entering data into the Data Editor is similar to entering data into a spreadsheet. One major difference is that the Data Editor has the concept of observations, which makes the data entry smart. We will illustrate this with an example. It will be useful for you to follow the example at your computer. To work along, you will need to start with an empty dataset, so save your dataset if necessary, and then type `clear` in the Command window.

Note: As a check to see if your data have changed, type `describe, short` (or `d,s` for short). Stata will tell you if your data have changed.

Suppose that we have the following data, and we want to enter them into Stata:


Make	Price	MPG	Weight	Gear ratio
VW Rabbit	4697	25	1930	3.78
Olds 98	8814	21	4060	2.41
Chev. Monza	3667		2750	2.73
AMC Concord	4099	22	2930	3.58
Datsun 510	5079	24	2280	3.54
	5189	20	3280	2.93
Datsun 810	8129	21	2750	3.55

We do not know MPG for the third car or the make of the sixth.

Start by opening the Data Editor in edit mode. You can do this either by clicking on the **Data Editor** button, , or by typing `edit` in the Command window. You should be greeted by a Data Editor with no data displayed. (If you see data, type `clear` in the Command window.) Stata shows the active cell by highlighting it and displaying `varname [obsnum]` next to the input box in the Cursor Location box. We will see below that we can navigate within a dataset by using this cell reference. The Data Editor starts, by default, in the first row of the first column. Because there are no data, there are no variable names, and so Stata shows `var1 [1]` as the active cell.

We can enter these data either by working across the rows (observation by observation) or by working down the columns (variable by variable). To enter the data observation by observation, press *Tab* after entering each value until you have reached the end of the first row. In our case, we would type `VW Rabbit`, press *Tab*, type `4697`, press *Tab*, and continue entering data to complete the first observation.

After you are finished with the first observation, select the second cell in the first column, either by clicking within it or by navigating to it. At this point, your screen should look like this:

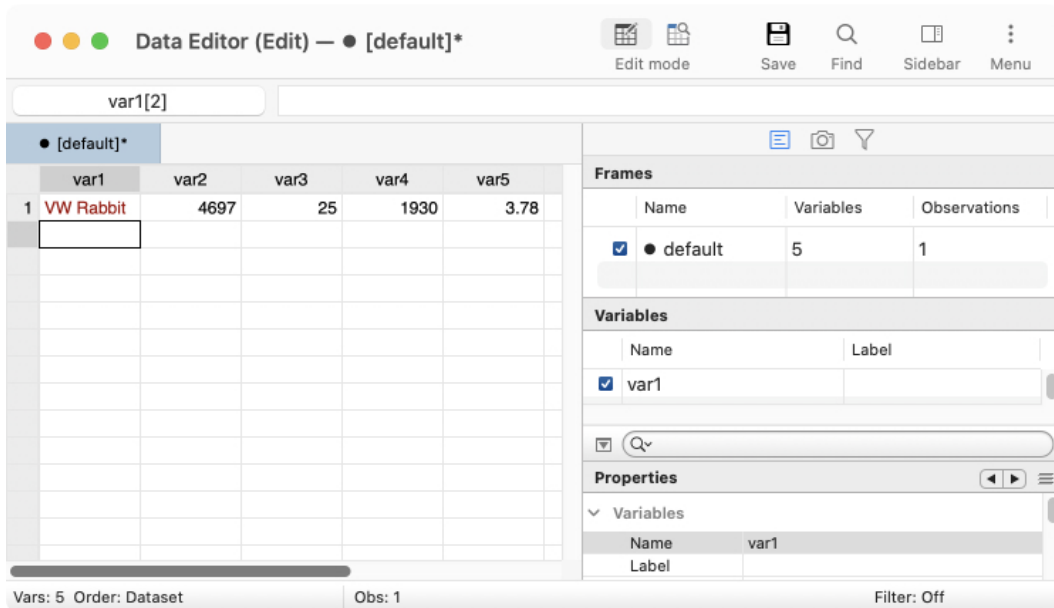

The screenshot shows the Stata Data Editor (Edit) window. The title bar reads "Data Editor (Edit) — • [default]*". The window is divided into several sections:

- Cursor Location:** A text box at the top left displays "var1[2]".
- Dataset View:** A table with columns labeled var1, var2, var3, var4, and var5. The first row contains the values "VW Rabbit", "4697", "25", "1930", and "3.78". The second row is currently selected, with the cursor in the first column (var1).
- Frames:** A panel on the right showing the active frame "• default" with 5 variables and 1 observation.
- Variables:** A panel showing the variable "var1" selected.
- Properties:** A panel showing the properties of the selected variable "var1".

At the bottom of the window, the status bar indicates "Vars: 5 Order: Dataset" and "Obs: 1". The filter is set to "Filter: Off".

We can now enter the data for the second observation in the same fashion as the first—with one nice difference: after we enter the last value in the row, pressing the *Tab* key will bring us to the first cell in the third row. This is possible because the number of variables is known after the first observation has been entered, so Stata knows when it has all the data for an observation.

We can enter the rest of the data by pressing the *Tab* key between entries, simply skipping over missing values by tabbing through them.

If we had wanted to enter the data variable by variable, we could have done that by pressing *Return* between each make of car until all seven observations were entered, skipping past the missing entry by pressing *Return* twice. Once the first variable was entered, we would select the first cell in the second column and enter the price data. We would continue this until we were finished.

Notes on data entry

There are several things to note about data entry and the feedback you get from the Data Editor as you enter data:

- **Stata does not allow blank columns or rows in the middle of your dataset.**
Whenever you enter new variables or observations, always begin in the first empty column or row. If you skip columns or rows, Stata will fill in the intervening columns or rows with missing values.
- **Strings and value labels are color coded.**
To help distinguish between the different types of variables in the Data Editor, string values, value labels (see [GSM] 9 Labeling data), and all other values are displayed in different colors. You can change the colors for strings and value labels by right-clicking on the Data Editor window and selecting **Preferences...**
- **A period (.) represents Stata's system missing numeric value.**
Stata has a system missing value, '.', and extended missing values '.a' through '.z'. By default, Stata uses its system missing value.
- **The Tab key is smart.**
As we saw above, after the first observation has been entered, Stata knows how many variables you have. So at the end of the second observation (and all subsequent observations), *Tab* will automatically take you back to the first column.
- **The Cursor Location box both shows location and is used for navigation.**
The Cursor Location box gives the location of the current cell. If you see, for example, `var3[4]`, this means that the current cell is the fourth observation of the variable named `var3`. You can navigate to a particular cell by typing the variable name and the observation in the Cursor Location box. If you wanted the second observation of `var1` to be the active cell, typing `var1 2` in the Cursor Location box and pressing *Return* would take you there.
- **Double quotes around text are unnecessary in string variables.**
Once Stata knows that a variable is a string variable (it holds text), there is no need to put quotes around the values, even if the values look like a number. Thus, if you wanted to enter ZIP codes as text, you would enter the first ZIP code with quotes ("02173"), but the rest would not need any quotes.
- **The arrow keys are context sensitive.**
If you select a cell and type new data, using an arrow key will accept the change and move to a new active cell. If you double-click on a cell, you can edit within the cell contents. In this case, the right- and left-arrow keys move within the cell's data.
- **You can throw away changes to a cell.**
If, while you are entering data in a cell, you decide you would like to cancel the changes, press the *Esc* key.
- **You can resize the cell editor for string variables.**
When editing string variables, the cell editor can be resized so that more text can be visible.

Renaming and formatting variables

The data have now been entered into Stata, but the variable names leave something to be desired: they have the default names `var1`, `var2`, ..., `var5`. We would like to rename the variables so that they match the column titles from our dataset. We would also like to give the variables descriptions and change their formatting.

We will step through changing the name, label, and format of the price variable. We will then add a note to the variable. Start by making sure that the Variables tab is active in the sidebar. If you do not see a list of variables in the sidebar, click on the Variables button, . Now click on the var2 variable in the Variables window. The few properties associated with var2 are now visible and editable in the Properties window. We may now systematically change the properties of var2 to our choosing:

1. Double-click on var2 in the *Name* field to select the old variable name, and type price to overwrite the name.
2. Double-click under the new price name in the *Label* field.
3. Enter a worthwhile label, such as Price in dollars.
4. Click on %9.0g in the *Format* field.
5. Click on the ellipsis (...) button that appears. The *Create format* dialog opens.
6. You can see here that there are many possible formats, most of which are related to time. We want commas in our numbers, so check the *Use commas in numeric output* checkbox. When you are done, click on the **OK** button.
7. Click in the *Notes* field.
8. Click on the ellipsis (...) button that appears. A dialog called *Notes for price* opens.
9. Click on the **Add** button and type a clever note.
10. When you are done typing, click on the **Submit** button, and then click on the **Close** button. This note is now attached to the price variable.
11. Click on the disclosure control to see the note you just typed in the Properties window.

To edit the properties of another variable, either click on the variable in the Variables window or use the navigation arrows in the *Properties* window until the variable's name appears. We can name the first variable make; the third, mpg; the fourth, weight; and the fifth, gear_ratio. Just before you rename var5 to gear_ratio, your screen should look like this:

Data Editor (Edit) — ● [default]*

Edit mode

Save

Find

Sidebar

Menu

make[1]

VW Rabbit

● [default]*

	make	price	mpg	weight	var5
1	VW Rabbit	4,697	25	1930	3
2	Olds 98	8,814	21	4060	2
3	Chev. Monza	3,667	.	2750	2
4	AMC Concord	4,099	22	2930	3
5	Datsun 510	5,079	24	2280	3
6		5,189	20	3280	2
7	Datsun 810	8,129	21	2750	3

Frames

	Name	Variables	Observations
☒	● default	5	7

Variables

	Name	Label
☒	price	Price in dollars

Qv

Properties

Variables

Name	make
Label	

Vars: 5

Order: Dataset

Obs: 7

Length: 13

Filter: Off

You need to know some rules for variable names:

- Stata is case sensitive.
Make, make, and MAKE are all different names to Stata. If you had named your variables Make, Price, MPG, etc., then you would have to type them correctly capitalized in the future. Using all lowercase letters is easier.
- A variable name must be 1–32 characters long.
- The characters can be letters (A–Z, a–z), digits (0–9), underscores (_), or Unicode characters that are not symbols.
- Spaces or other characters are not allowed.
- The first character of a variable name must be a letter, an underscore, or a Unicode character.
Although you can use an underscore to begin a variable name, it is highly discouraged. Such names are used for temporary variable names in Stata. You would like your data to be permanent, so using a temporary name could lead to great frustration.

For more information about variable names and value labels, see [\[GSM\] 9 Labeling data](#); for display formats, see [\[U\] 12.5 Formats: Controlling how data are displayed](#).


Copying and pasting data

You can copy and paste data by using the Data Editor. This is often a simple way to bring data into Stata from any other applications such as spreadsheets or databases.

1. Select the data that you wish to copy by using one of these means:
 - Click once on a variable name or column heading to select an entire column.
 - Click once on an observation number or row heading to select the entire row.
 - Click and drag the mouse to select a range of cells.
2. Copy the data to the Clipboard by right-clicking within the selected range, and select **Copy**.
3. Paste the data from the Clipboard by right-clicking on the top left cell of the area to which you wish to paste, and select **Paste**.

We will illustrate copying and pasting an observation by making a copy of the first observation and pasting it at the end of the dataset.

Start by clicking on the observation number of the first observation. Doing so highlights all the data in the row. Right-click on the same location (there is no need to move the mouse), and select **Copy**:

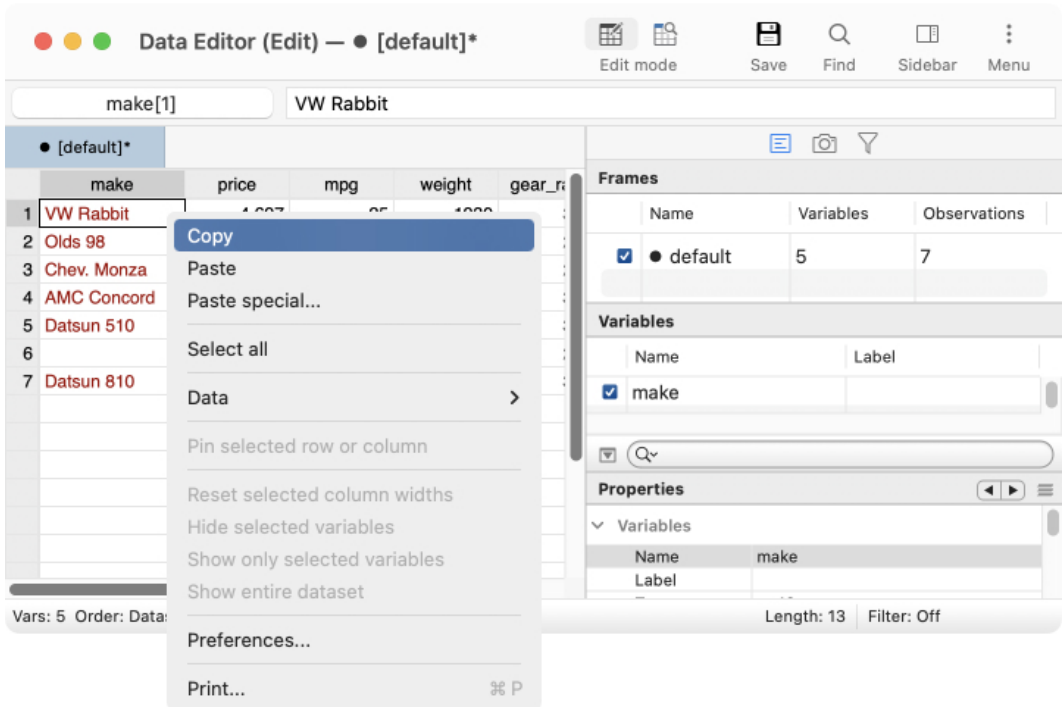

Click on the first cell in the eighth row, right-click while you are still in that cell, and choose **Paste** from the resulting menu. You can see that the observation was successfully duplicated.

Notes on copying and pasting

- The above example illustrated copying and pasting within the Data Editor. You can use roughly the same technique to copy and paste between other applications and Stata and between Stata and other applications. The easiest way to see if copying and pasting works properly with another application is to try it. The one requirement for things to work well is that the external application must copy tables in some delimited form, as do spreadsheet applications, many database applications, and some word processors. Using **Edit > Paste special...** gives some added flexibility to the formats you can paste into the Data Editor. If a simple paste does not give you what you expected, you should try **Edit > Paste special...**. For more information on file-based methods for importing data into Stata, see [\[GSM\] 8 Importing data](#).
- If you are copying and pasting data with value labels, you have a choice. You can copy variables with value labels as text, using the value labels as the actual values, or you can copy said variables as their underlying encoded numbers. Copying with the value labels is the default. If you would like the other choice, select **View > Data Editor > Show all value labels**. In StataNow, you can also select **Menu > View > Show all value labels**.

Changing data

As its name suggests, the Data Editor can be used to edit your dataset. As we have seen already, it can be used to edit the data themselves as well as the description and display options for the variables.

Here is an example for making some changes to the automobile dataset, which illustrates both methods for using the Data Editor and its documentation trail. We will also keep snapshots of the dataset as we are working so that we can revert to previous versions of the dataset in case we make a mistake.


We would like to investigate the dataset, work with value labels, delete the `trunk` variable, and make a new variable showing gas consumption per 100 miles. These tasks will illustrate the basics of working in the Data Editor.

Start by typing `sysuse auto` into the Command window. If you worked the previous example, you will get an error and are told that the dataset in memory has changed since it was last saved. This is good—Stata is keeping you from inadvertently throwing away the unsaved changes to your current dataset as it loads `auto.dta`. If you would like to save the dataset you have been working on, select **File > Save** and save the dataset in an appropriate location. Otherwise, type `clear` in the Command window, and press *Return* to clear out the data, and then load that `auto.dta`.

Once `auto.dta` is loaded, start the Data Editor.

1. We remember that our grandfather had a Toronado, which looked sleek but seemed to require a lot of fill-ups. We would like to see if this car is in the dataset. To find it, we select **Edit > Find**, type `Toronado`, and press *Return*. We see that this make of car got 16 miles per gallon.
2. We would like to see which cars have the lowest and highest gas mileages. To do this, right-click on the column heading of the `mpg` column. Select **Data > Sort** from the contextual menu. A dialog will pop up asking how you want to sort, defaulting to sorting in ascending order. Click on **OK**. (Stata worries about sort order because sort order can affect reproducibility when using resampling techniques. This is a good thing.) You will see that the data have now been sorted by `mpg` in ascending order. The lowest-mileage cars are at the top of the screen; by scrolling to the bottom of the dataset, you can find the highest-mileage cars.
3. We would like to investigate repair records and hence sort by the `rep78` variable. (Do this now.) We see that the `Starfire` and `Firebird` both had poor repair records, but we would like to see the cars with good repair records. We could scroll to the bottom of the dataset, but it will be faster to use the Cursor Location box: type `rep78 74` and press *Return* to make `rep78 [74]` the active cell. We notice that the last five entries for `rep78` appear as dots. The dots mean that these values are missing. A few items of note:
 - As we can see from the result of the sort, Stata views missing values as being larger than all numeric nonmissing values. In technical terms, this means that `rep78 >= .` is equivalent to `missing(rep78)`.
 - What we do not see here is that Stata has multiple missing-value indicators: `.` is Stata's default or system missing-value indicator, and `.a`, `.b`, ..., `.z` are Stata's extended missing values. Extended missing values are useful for indicating the reason why a value is unknown.
 - The different missing values sort among themselves: `. < .a < .b < ... < .z`. See [\[U\] 12.2.1 Missing values](#) for full details.
4. We would like to make the repair records readable. Click on `rep78` in the Variables window.
5. Click on the *Value label* field in the Properties window, and then click on the ellipsis (...) button that appears. This opens the *Manage value labels* dialog. We need to define a new value label for the repair records.
 - a. Click on the **Create label** button. You will see the *Create label* sheet.

- b. Type a name for the label, say, *repairs*, in the *Label name* box.
- c. Press the *Tab* key or click within the *Value* field.
- d. Type 1 for the value, press the *Tab* key, and type *atrocious* for the label.
- e. Press the **Add** button to create the pairing.
- f. Repeat steps d and e to make all the pairings: 2 with “bad”, 3 with “OK”, 4 with “good”, and 5 with “stupendous”.
- g. Click on the **OK** button to finish creating the value label.
- h. Click on the disclosure control, **>**, to show the label—you should see this:

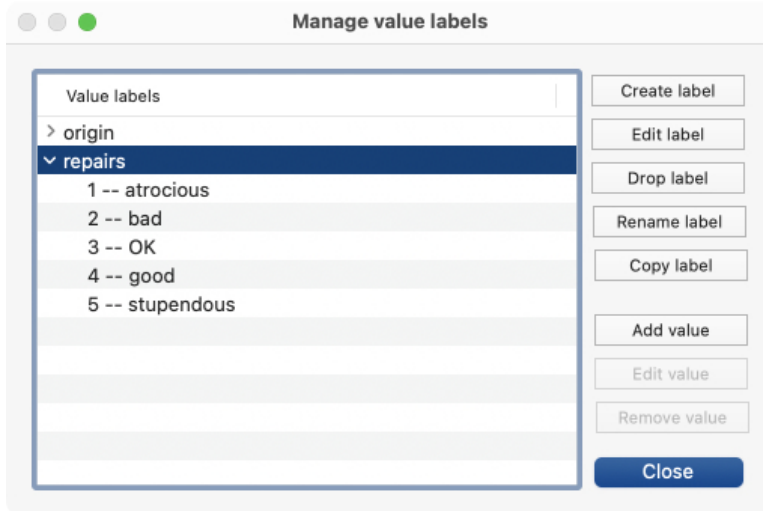

If you have something else, you can edit the label by clicking on the **Edit label** button.

- i. Click on the **Close** button to close the *Manage value labels* dialog.

Now that the label has been created, attach it to the *rep78* variable by clicking on the double arrows in the *Value label* field and selecting the **repairs** label. You can now see the labels displayed in place of the values.

6. Suppose that we found the original source of the data in a time capsule, so we could replace some of the missing values for *rep78*. We could type the values into cells. We can also assign the values by right-clicking within a cell with a missing value and choosing a value from **Data > Value labels > Assign value from value label “repairs”**. This strategy can be useful when a value label has many possible values.
7. We would now like to delete the *trunk* variable. We can do this by right-clicking on the *trunk* variable name at the top of the column and selecting the **Data > Drop selected data** menu item. Because this can lead to data loss, the Data Editor asks whether we would like to drop the selected variable. Click on the **Drop** button.

8. To finish, we would like to create a variable containing the gallons of gasoline per 100 miles driven for each of the cars.
 - a. Right-click within any cell, and choose the **Data > Add variable...** menu item to bring up the *generate* dialog.
 - b. Type `gp100m` in the *Variable name* field.
 - c. Being sure that the *Specify a value or an expression* radio button is selected, type `100/mpg` in its field. We could have clicked on the **Create...** button to open the *Expression Builder* dialog, but this formula was simple enough to type. (You might want to explore the Expression Builder right now to see what it can do.)
 - d. Be sure that the *Add at the end of dataset* item is chosen from the *Position of new variable* list.
 - e. Click on **OK**. You can scroll to the right to see the newly created variable.

Throughout this data-editing session, we have been using the Data Editor to manipulate the data. If you look in the Results window, you will see the commands and their output. You can also see all the commands generated by the Data Editor in the History window. If you wanted to save the editing commands to use again later, you could do the following steps:

1. Click in the History window on the last command that came from the Data Editor.
2. Scroll up until you find the `sort mpg` command you ran immediately after opening the Data Editor, and *Shift-click* on it.
3. Right-click on one of the highlighted commands.
4. Select **Send selected to Do-file Editor**.

This procedure will save all the commands you highlighted into the Do-file Editor. You could then save them as a do-file, which you could run again later. We will talk more about the Do-file Editor in [\[GSM\] 13 Using the Do-file Editor—automating Stata](#). You can find help about do-files in [\[U\] 16 Do-files](#).

If you want to save this dataset, save it under a new name by using **File > Save as...** to prevent overwriting the original dataset.

Working with snapshots

The Data Editor allows you to save to disk snapshots of whatever dataset you are working on. These are temporary copies of the dataset—they will be deleted when you quit Stata, so they need to be treated as temporary. Still, there are many uses for snapshots, such as

- saving a temporary copy of the data in memory so that another dataset can be opened and viewed;
- saving stages of work, which can be recovered in case you do something disastrous; and
- saving pieces of datasets while doing analyses.

We will keep using `auto.dta` from above; if you are starting here, you can start fresh by typing `sysuse auto` in the Command window to open the dataset. (If you get a warning about data in memory being lost, either use `clear` or save your data. See [\[GSM\] 5 Opening and saving Stata datasets](#) for more information.) If we open the Data Editor and click on the **Snapshots** button in the sidebar, we see the following window. If you are starting afresh, you will see numbers rather than labels for `rep78`.

• [default] auto.dta*

rep78[1] 1

	make	price	mpg	rep78
1	Pont. Firebird	4,934	18	atrocious
2	Olds Starfire	4,195	24	atrocious
3	Plym. Volare	4,060	18	bad
4	Pont. Sunbird	4,172	24	bad
5	Dodge Diplomat	4,010	18	bad
6	Cad. Eldorado	14,500	14	bad
7	Dodge St. Regis	6,342	17	bad
8	Chev. Monza	3,667	24	bad
9	Dodge Magnum	5,886	16	bad
10	Chev. Monte Carlo	5,104	22	bad
11	Pont. Grand Prix	5,222	19	OK
12	Olds Toronado	10,371	16	OK
13	Olds Cutl Supr	5,172	19	OK
14	Ford Mustang	4,187	21	OK
15	Buick Regal	5,189	20	OK

Snapshots

#	Label	Timestamp	Source
---	-------	-----------	--------

Vars: 12 Order: Dataset Obs: 74 Filter: Off

To begin with, only one button is active in the Snapshots toolbar. Click on the active button—the **Add** button, . It brings up a dialog asking for a label, or name, for the snapshot. Give it an inventive name, such as **Start**, and press *Return*. You can see that a snapshot is now listed in the Snapshots window, and all the buttons in the toolbar are now active. The following buttons appear in the Snapshots window:

-  **Add:** Save a new snapshot with a timestamp and label.
-  **Remove:** Erase a snapshot. This action deletes the temporary snapshot file but does not affect the data in memory.
-  **Change label:** Edit the label of the selected (highlighted) snapshot.
-  **Restore:** Replace the data in memory with the data from the selected snapshot. You will get a dialog asking you to confirm your action.

You should now try manipulating the dataset by using the tools we have seen. Once you have done that, create another snapshot, calling it **Changed**. Open the Snapshots window and restore the **Start** snapshot by either double-clicking it or clicking first on it and then on the **Restore** button to see where you started. You can then go back to where you were working by restoring your **Changed** snapshot.

Snapshots continue to be available either until they are deleted or until you quit Stata. You can thus use snapshots of one dataset while working on another. You will find your own uses for snapshots—just take care to save the datasets you want for future use because the snapshots are temporary.

Dates and the Data Editor

The Data Editor has two special tools for working with dates in Stata. To see these in action, we will need to open another dataset. Either save your dataset or clear it out, and then type `sysuse sp500` in the Command window. Look in the Data Editor to see what you have.

Data Editor (Edit) — • [default] sp500....

Edit mode

Save

Find

Sidebar

Menu

date[1]

02jan2001

DMY

• [default] sp500.dta

	date	open	high	low	close
1	02jan2001	1320.28	1320.28	1276.05	1283.1
2	03jan2001	1283.27	1347.76	1274.62	1347.1
3	04jan2001	1347.56	1350.24	1329.14	1333.1
4	05jan2001	1333.34	1334.77	1294.95	1298.1
5	08jan2001	1298.35	1298.35	1276.29	1295.1
6	09jan2001	1295.86	1311.72	1295.14	1300.1
7	10jan2001	1300.8	1313.76	1287.28	1313.1
8	11jan2001	1313.27	1332.19	1309.72	1326.1
9	12jan2001	1326.82	1333.21	1311.59	1318.1
10	16jan2001	1318.32	1327.81	1313.33	1326.1
11	17jan2001	1326.65	1346.92	1325.41	1329.1
12	18jan2001	1329.89	1352.71	1327.41	1347.1
13	19jan2001	1347.97	1354.55	1336.74	1342.1
14	22jan2001	1342.54	1353.62	1333.84	1342.1
15	23jan2001	1342.9	1362.9	1339.63	1360.1
16	24jan2001	1360.4	1369.75	1357.28	1364.1
17	25jan2001	1364.3	1367.35	1354.63	1357.1
18	26jan2001	1357.51	1357.51	1342.75	1354.1

Frames

	Name	Variables	Observations
☒	• default	7	248

Variables

	Name	Label
☒	date	Date
☒	open	Opening price
☒	high	High price
☒	low	Low price

Properties

Variables

	Name	date
	Label	Date
	Type	int
	Format	%td

Vars: 7

Order: Dataset

Obs: 248

Filter: Off

You can see a date variable that has January 2, 2001, as its first day, though it is being displayed in Stata’s default format for dates.

We will start with formatting:

1. Select the `date` variable in the Variables window to the right of the data table.
2. In the Properties window, select the Format row and click on the ellipsis button that appears.
3. The *Create format* dialog tells us three pieces of information about the date format:
 - These are daily dates. As you can see, Stata understands other types of dates that are often used in financial data.
 - Looking at the bottom of the dialog, you can see that Stata’s default date format is `%td`. This means that the variable contains time values that are to be interpreted as daily dates.
 - This default format is displayed as, for example, `07apr2024`.
4. There are many premade date formats in the *Samples* pane at the top right of the *Create format* dialog. Click on April 7, 2024. You can see how the format would be specified at the bottom of the dialog.
5. Click on **OK** to close the *Create format* dialog. You can see that the dates are now displayed differently.

This is a very simple way to change date formats. For complete information on dates and date formats, see [D] [Datetime](#).

We will now change some of the dates to illustrate how this can be done simply, regardless of the format in which the dates are displayed. If you look in the upper-right corner of the Data Editor, you will see the *Time/Date input mask* field, which shows DMY. This field affects how dates are entered when editing data.

By default, the input mask is set to DMY. This means dates can be entered in many different fashions, as long as the order of the date components is day, month, year. Try the following:

1. Click in the first observation of date so that the Cursor Location shows date[1].
2. Type 18jan2024 and press the *Return* key. Stata understands the DMY input mask and knows enough to enter the new date in the selected cell.
3. Enter 30042024 and press *Return*. Stata still understands the input mask, even though there are no separators.
4. Click within the *Time/Date input mask* field, and choose MDY from the drop-down menu.
5. Click on any observation in the date column.
6. Type March 15, 2024 and press *Return*. Stata will still understand.

Working in this fashion is the fastest way to edit dates by hand. If you look in the Results window, you will see why.

We are now finished with this dataset, so type `clear` and press *Return*.

Data Editor advice

As you could see above, a small mistake in the Data Editor could cause large problems in your dataset. You really must take care in how you edit your data.

- People who care about data integrity know that editors are dangerous—it is easy to accidentally make changes. **Never use the Data Editor in edit mode when you just want to look at your data.** Use the Data Editor in browse mode (or use the `browse` command).
- If you must edit your data, protect yourself by limiting the dataset's exposure. For example, if you need to change `rep78` only if it is missing, find a way to look at just the missing values for `rep78` and any other variables needed to make the change. This will make it impossible for you to change (damage) variables or observations other than those you view. We will explore this aspect shortly.
- Even with these caveats, Stata's Data Editor is safer than most because it records commands in the Results window. Use this feature to log your output and make a permanent record of the changes. Then you can verify that the changes you made are the changes you wanted to make. See [GSM] 16 [Saving and printing results by using logs](#) for information on creating log files.

Filtering and hiding

We would now like to investigate restricting our view of the data we see in the editor. This feature is useful for the reasons mentioned above, and as we will see, it helps if we would like to browse through the data of a large dataset. In any case, we would like to focus on some data, not all the data, whether we focus on some of the variables, some of the observations, or even just some observations within some variables. We would also like to change the order of the variables. We will show you how this is done by using both the graphical interface and commands.

Open the automobile dataset by typing `sysuse auto`. If you get an error message, type `clear` and try again. Once you have done that, open the Data Editor.

Suppose that we would like to edit only those observations for which `rep78` is missing. We will need to look at the make of the car so that we know which observations we are working with, but we do not need to see any other variables. We will work as though we had a very large dataset to work with.

1. Before we get started, try experimenting with the Variables window.
 - a. Drag variables up and down the list. Doing so changes the order of the variables' columns in the Data Editor. It does not change their order in the dataset itself.
 - b. Uncheck some of the checkboxes in the first column to hide some of the variables.
 - c. Type a search criterion in the search field. Just like in the Variables window in the main Stata window, the default is to ignore case and find any variables or variable labels containing any of the words in the filter. Clicking on the arrow by the magnifying glass will allow you to change this behavior. The filtering of variables in the list affects what is displayed in the Variables window; it does not affect what variables' data are displayed. When you are done, delete your filter text.
2. Right-click on any variable in the Variables window, and select **Select all** from the contextual menu.
3. Click on any checkbox to deselect all the variables.
4. Click on the make variable to select it, and deselect all the other variables.
5. Click on the checkbox for make.
6. Click on the checkbox for `rep78`.

If you look in the Command window, you can see that no commands have been issued, because hiding the variables does not affect the dataset—it affects only what shows in the Data Editor.

We now have protected ourselves by using only those variables that we need. We should now reduce our view to only those observations for which `rep78` is missing. This is simple.

1. Click on the **Filter observations** tab, , in the sidebar.
2. Enter `missing(rep78)` in the *Filter by expression* field.
3. Click on the **Apply filter** button.
4. If you are curious, click on the ellipsis button. It opens up an *Expression Builder* dialog. This lists the wide variety of functions available in Stata. See the [Stata Functions Reference Manual](#).


Now we are focused on the part of the dataset in which we would like to work, and we cannot destroy or mistakenly alter other data by stray keystrokes in the Data Editor window.

It is worth learning how to hide variables and filter observations in the Data Editor from the Command window. This can be quite convenient if you are going to restrict your view, as we did above. To work from the Command window, we must use the `edit` command together with a *varlist* (variable list) along with `if` and `in` qualifiers in the Command window. By using a *varlist*, we restrict the variables we look at, whereas the `if` and `in` qualifiers restrict the observations we see. ([GSM] 10 Listing data and basic command syntax contains many examples of using a command with a variable list and `if` and `in`.) Suppose we want to correct the missing values for `rep78`. The minimum amount of data we need to expose are `make` and `rep78`. To see this minimal amount of information and hence to minimize our exposure to making mistakes, we enter the commands

```
. sysuse auto
(1978 automobile data)

. edit make rep78 if missing(rep78)
```

and we would see the following window:

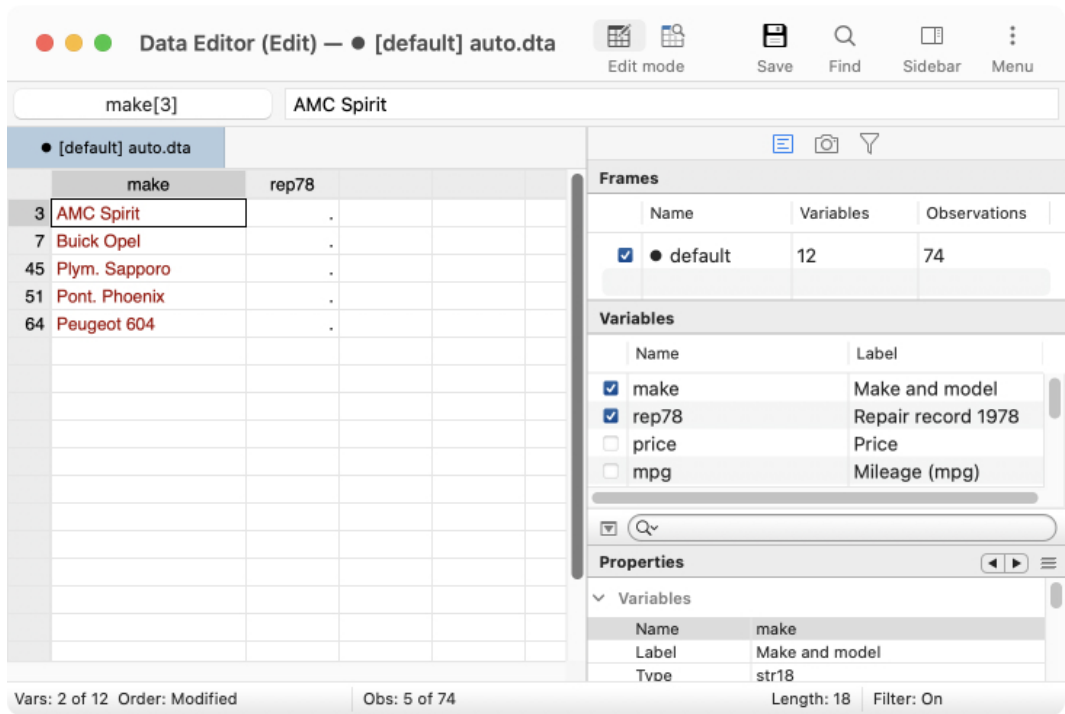

Once again, we are safe and sound.
Keep this lesson in mind if you edit your data. It is a lesson well learned.

Browse mode

The purpose of using the Data Editor in browse mode is to look at data without altering them by stray keystrokes. In browse mode, various fields, as well as pasting, are disabled to prevent accidental changes. You can start the Data Editor in browse mode by clicking on the **Data Editor (Browse)** button, , or by typing browse in the Command window. You may view a variable’s properties in the Properties window, but you may not make any changes. However, you still have power in browse mode: overt actions from menu items and contextual menu items can still be performed. Furthermore, you can still filter observations and hide variables to get a restricted view.

Note: Because you can still use Stata menus and because you can still type commands in the Command window, it is possible to change the data even if the Data Editor is in browse mode. In fact, this means you can watch how your commands affect the dataset. You are merely protected from accidentally changing the data from within the Data Editor.

Variable labels in column headers and column width control

Variable labels can also be shown in the column headers. Go to **View > Data Editor** and check **Show variable labels in column headers**. Given the length of the variable labels, you can make the column a bit wider by dragging the left–right arrow column divider between columns.

Data Editor (Browse) — • [default] auto.dta

Edit mode

Save

Find

Sidebar

Menu

make[1]

AMC Concord

• [default] auto.dta

	make	price	mpg	rep78	headroom
	Make and model	Price	Mileage...	Repair r...	Headro...
1	AMC Concord	4,099	22	3	2.5
2	AMC Pacer	4,749	17	3	3.0
3	AMC Spirit	3,799	22	.	3.0
4	Buick Century	4,816	20	3	4.5
5	Buick Electra	7,827	15	4	4.0
6	Buick LeSabre	5,788	18	3	4.0
7	Buick Opel	4,453	26	.	3.0
8	Buick Regal	5,189	20	3	2.0
9	Buick Riviera	10,372	16	3	3.5
10	Buick Skylark	4,082	19	3	3.5
11	Cad. Deville	11,385	14	3	4.0
12	Cad. Eldorado	14,500	14	2	3.5
13	Cad. Seville	15,906	21	3	3.0
14	Chev. Chevette	3,299	29	3	2.5
15	Chev. Impala	5,705	16	4	4.0
16	Chev. Malibu	4,504	22	3	3.5
17	Chev. Monte Carlo	5,104	22	2	2.0
18	Chev. Monza	3,667	24	2	2.0

Frames

Name	Variables	Observations
☒ • default	12	74

Variables

Name	Label
☒ make	Make and model

☒ Q~

Properties

Variables

Name	make
Label	Make and model
Type	str18
Format	%-18s
Value label	
Notes	No notes

Data

Filename

auto.dta

Vars: 12 Order: Dataset

Obs: 74

Length: 18 Filter: Off

Drag the column divider and make sure all variable labels are fully displayed. Column widths are preserved when saving the dataset. When you have a string value that is longer than the column width, the value displayed in the cell view will be truncated. The Data Editor has tooltip support for truncated cell views. You can hover the mouse pointer over the cell to view the full string value in a tooltip. You can also double-click in the cell to bring up a resizable cell editor for long strings.

Pinning rows and columns

The Data Editor can pin rows and columns. Pinned rows or columns do not scroll with the rest of the data, so they will stay in view as you scroll through the dataset. Let’s switch to another dataset by issuing `sysuse census`. This is the 1980 census data by states in the United States. Let’s start the Data Editor in browse mode. There are 50 states and we are limited to the screen size, so we might not be able to browse all observations and variables at the same time. Moreover, when browsing the data, sometimes we might want to pin some states or observations so we can eyeball the difference. Let’s see some examples below.

After right-clicking on any cell, you will see that **Pin selected row or column** is disabled.

Alabama

state[1]

state

state2

region

pop

pop15

1 Alabama 296,412

2 Alaska 38,949

3 Arizona 213,883

4 Arkansas 175,592

5 California 1,708,400

6 Colorado 216,495

7 Connecticut 185,188

8 Delaware 41,151

9 Florida 570,224

10 Georgia 414,935

11 Hawaii 77,848

12 Idaho 93,531

13 Illinois 842,241

14 Indiana 418,764

15 Iowa 221,628

16 Kansas 180,877

17 Kentucky 282,731

Copy

Paste

Paste special...

Select all

Data

Pin selected row or column

Reset selected column widths

Hide selected variables

Show only selected variables

Show entire dataset

Preferences...

Print...

Frames

Name

Variables

Observations

default

13

50

Variables

Name

Label

state

State

Properties

Variables

Name

state

Label

State

Type

str14

Format

%-14s

Value label

Notes

No notes

Data

Vars: 13 Order: Dataset

Obs: 50

Length: 14 Filter: Off

If you first click on a column header to highlight a particular variable, such as `state`, right-clicking brings up a similar menu but with the option **Pin selected variables** enabled. More than one variable can be selected and pinned.

Data Editor (Browse) — • [default] census.dta

1C

Alabama

• [default] census.dta

state

state2

region

pop

poplt5

1	Alabama	Al	South	3,893,888	296,412
2	Alaska				38,949
3	Arizona				213,883
4	Arkansas				175,592
5	California				1,708,400
6	Colorado				216,495
7	Connecticut				185,188
8	Delaware				41,151
9	Florida				570,224
10	Georgia				414,935
11	Hawaii				77,848
12	Idaho				93,531
13	Illinois				842,241
14	Indiana				418,764
15	Iowa				221,628
16	Kansas				180,877
17	Kentucky				282,731

Copy

Paste

Paste special...

Select all

Data

Pin selected variables

Reset selected column widths

Hide selected variables

Show only selected variables

Show entire dataset

Preferences...

Print...

Frames

Name	Variables	Observations
• default	13	50

Variables

Name	Label
state	State

Properties

Variables

Name	state
Label	State
Type	str14
Format	%-14s
Value label	
Notes	No notes

Data

Length: 14 | Filter: Off

After pinning the state information, we can horizontally scroll to the right to see other variables that previously could not fit in the window, such as marriage and divorce, with the state information pinned on the left.

● Data Editor (Browse) — ● [default] census.dta

Edit mode

Save

Find

Sidebar

Menu

state[1]

Alabama

● [default] census.dta

	state	marriage	divorce		
1	Alabama	49,018	26,745		
2	Alaska	5,361	3,517		
3	Arizona	30,223	19,908		
4	Arkansas	26,513	15,882		
5	California	210,864	133,541		
6	Colorado	34,917	18,571		
7	Connecticut	26,048	13,488		
8	Delaware	4,437	2,313		
9	Florida	108,344	71,579		
10	Georgia	70,638	34,743		
11	Hawaii	11,856	4,438		
12	Idaho	13,428	6,596		
13	Illinois	109,823	50,997		
14	Indiana	57,853	40,006		
15	Iowa	27,474	11,854		
16	Kansas	24,847	13,410		
17	Kentucky	32,727	16,731		
18	Louisiana	43,460	18,108		
19	Maine	12,040	6,205		
20	Maryland	46,278	17,494		

Frames

	Name	Variables	Observations
● default		13	50

Variables

	Name	Label
✓	state	State
✓	state2	Two-letter state a...
✓	region	Census region
✓	pop	Population
✓	poplt5	Pop, < 5 year

Properties

Variables

Name	state
Label	State
Type	str14
Format	%-14s
Value label	
Notes	No notes

Length: 14 | Filter: Off

Vars: 13 | Order: Dataset

Obs: 50

Similarly, you can highlight one or more observations and right-click to pin a particular row or multiple rows.

Data Editor (Browse) — • [default] census.d...

Edit mode

Save

Find

Sidebar

Menu

3R

Alabama

• [default] census.dta

	state	marriage	divorce		
1	Alabama	49,018	26,745		
2	Alaska	5,361	3,517		
3	Arizona				
4	Arkansas				
5	California				
6	Colorado				
7	Connecticut				
8	Delaware				
9	Florida				
10	Georgia				
11	Hawaii				
12	Idaho				
13	Illinois				
14	Indiana				
15	Iowa				
16	Kansas				
17	Kentucky				
18	Louisiana				
19	Maine				
20	Maryland				

Copy

Paste

Paste special...

Select all

Data >

Pin selected observations

Reset selected column widths

Hide selected variables

Show only selected variables

Show entire dataset

Preferences...

Print... % P

Frames

	Name	Variables	Observations
☒	• default	13	50

Variables

	Name	Label
☒	state	State
☒	state2	Two-letter state a...
☒	region	Census region
☒	pop	Population
☒	poplt5	Pop, < 5 year

Properties

Variables

Name	
Label	
Type	
Format	
Value label	
Notes	

Vars: 13

Order: Dataset

Obs: 50

Length: 14

Filter: Off

Let’s try pinning the observations from 1 through 3, and then let’s vertically scroll down to other states and compare them with the first three.

● Data Editor (Browse) — ● [default] census.d...

Edit mode

Save

Find

Sidebar

Menu

state[1]

Alabama

● [default] census.dta

	state	marriage	divorce		
1	Alabama	49,018	26,745		
2	Alaska	5,361	3,517		
3	Arizona	30,223	19,908		
42	Tennessee	59,175	30,206		
43	Texas	181,762	96,809		
44	Utah	16,958	7,802		
45	Vermont	5,226	2,623		
46	Virginia	60,210	23,615		
47	Washington	47,728	28,642		
48	W. Virginia	17,391	10,273		
49	Wisconsin	41,111	17,546		
50	Wyoming	6,868	4,003		

Frames

	Name	Variables	Observations
☒	● default	13	50

Variables

Name	Label
☒ state	State

Properties

Variables

Name	state
Label	State
Type	str14
Format	%-14s
Value label	
Notes	No notes

Vars: 13

Order: Dataset

Obs: 50

Length: 14


Filter: Off

The pinning feature can be invoked in both browse and edit modes. You can pin both rows and columns at the same time. Right-click on any pinned rows or columns, and select **Clear pinned variables** or **observations** to unpin them.

Working with multiple frames

So far, we have been working with one dataset in memory, but Stata's data frames allow us to work with multiple datasets in memory. In [StataNow](#), you can view and edit multiple frames in the Data Editor. We provide an example below. Additionally, in [StataNow](#) you can access functions specific to the Data Editor directly through the toolbar's **Menu**  item; the **Menu**  item makes it easier to work in the Data Editor, as opposed to the top-level Stata menu, which contains other functionalities that are irrelevant to the Data Editor.

To get started, let's change the Data Editor to edit mode. And let's create a new frame called `cars` to load automobile data. Right-click in the Frames window and click on **Create new frame**. In the resulting dialog box, type `cars`, and click on the **OK** button to create the frame. Only the default frame is displayed. In the Frames window, check the checkbox next to `cars`, and you will see a tab with the frame name.

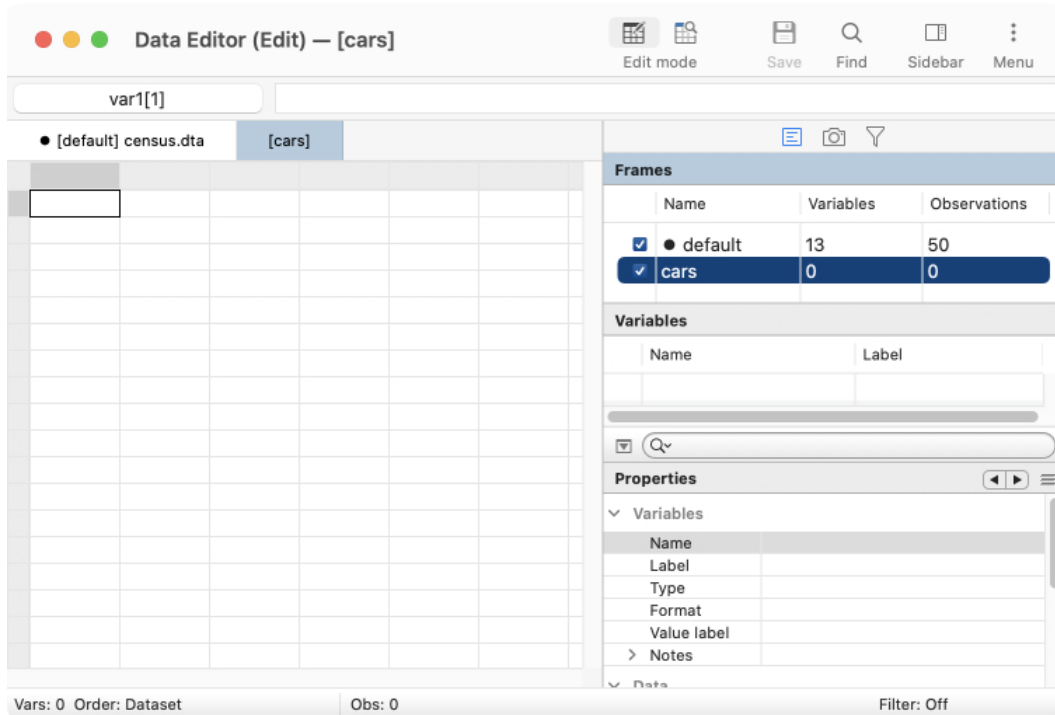

The screenshot shows the Stata Data Editor interface. The title bar reads "Data Editor (Edit) — [cars]". The top toolbar contains icons for "Edit mode", "Save", "Find", "Sidebar", and "Menu". Below the toolbar is a search bar containing "var1[1]". The main workspace is a grid with a tab labeled "[cars]" selected. On the right side, there are three panels: "Frames", "Variables", and "Properties".

The "Frames" panel displays the following table:

Name	Variables	Observations
☒ default	13	50
☒ cars	0	0

The "Variables" panel shows columns for "Name" and "Label".

The "Properties" panel shows a list of properties: Name, Label, Type, Format, Value label, and Notes.

The status bar at the bottom indicates "Vars: 0 Order: Dataset" and "Obs: 0".


All the features we described in previous sections work just as they did before but now on a frame-by-frame basis. Any changes we make in the Data Editor will be applied to the currently focused frame, `cars`. In other words, the tab that you have selected is the currently focused frame. Furthermore, when you are working with multiple frames, Stata will issue a warning when you are loading or saving data in a frame, prompting you to confirm whether the change you are making is intended for the currently focused frame. Previously, these file actions always worked with the current working frame, so Stata is letting you know that these actions are now frame (tab) specific. Once you are comfortable with the new behavior, you can check the box that says "Do not show this message again".

For example, we want to load `auto.dta` into the frame `cars`. This dataset is stored in the `ado-path`; to keep things simple, we create a frame called `temp` to save a copy of `auto.dta` in our working directory.

```
. clear all
. frame create temp
. frame temp: sysuse auto, clear
(1978 automobile data)
. frame temp: save auto, replace
file auto.dta saved
```

To load `auto.dta` in the `cars` frame, we click on **Menu**  **> File > Open ...**, select `auto.dta`, and click on **Open**.

We get a message informing us that we are opening `auto.dta` in the `cars` frame.

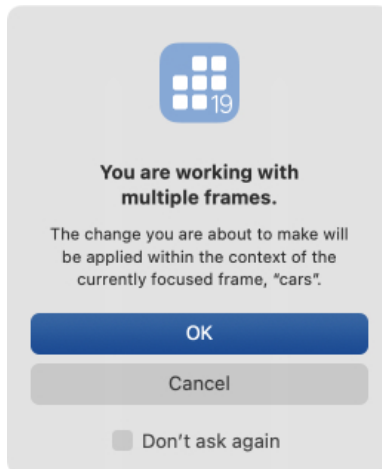

We click on **OK**, and now the automobile data appear in the cars frame:

Data Editor (Edit) — [cars] auto.dta

Edit mode

Save

Find

Sidebar

Menu

make[1]

AMC Concord

• [default] census.dta

[cars] auto.dta

	make	price	mpg	rep78	headroom
1	AMC Concord	4,099	22	3	2.5
2	AMC Pacer	4,749	17	3	3.0
3	AMC Spirit	3,799	22	.	3.0
4	Buick Century	4,816	20	3	4.5
5	Buick Electra	7,827	15	4	4.0
6	Buick LeSabre	5,788	18	3	4.0
7	Buick Opel	4,453	26	.	3.0
8	Buick Regal	5,189	20	3	2.0
9	Buick Riviera	10,372	16	3	3.5
10	Buick Skylark	4,082	19	3	3.5
11	Cad. Deville	11,385	14	3	4.0
12	Cad. Eldorado	14,500	14	2	3.5
13	Cad. Seville	15,906	21	3	3.0
14	Chev. Chevette	3,299	29	3	2.5
15	Chev. Impala	5,705	16	4	4.0
16	Chev. Malibu	4,504	22	3	3.5

Frames

Name	Variables	Observations
• default	13	50
cars	12	74
temp	12	74

Variables

Name	Label
make	Make and model
price	Price
mpg	Mileage (mpg)

Properties

Variables

Name	make
------	------

Vars: 12 Order: Dataset Obs: 74 Length: 18 Filter: Off

You can click on **Menu** ⋮ > **Data** > **Sort** to sort the data in this frame. You can filter observations, take a snapshot of these data, and so on. In the Data Editor, you can use the Variables and Properties windows just as before; these windows will populate with the corresponding data whenever you switch to another frame. For example, you can click on the tab for the default frame, and the Variables and Properties windows will be updated with the census data.

If you are new to Stata’s data frames, note that while we can have multiple data frames in memory, only one is the active frame. The active frame is the frame on which commands are issued by default. For example, if you type `describe` in the Stata Command window, you will see information on `census.dta`, even if we are currently looking at the cars tab in the Data Editor. Therefore, if we want to make a change to the data in the cars frame, we would have to type `frame cars:` before our command. The Data Editor handles this nicely; you will notice the frame prefix in the commands that are issued when you are working on a frame that is not the current working frame. In the Data Editor, a solid dot (•) is placed next to the current working frame.

Here are a few additional notes on working with multiple frames.

- Right-clicking within the Frames window of the Data Editor brings up a menu that allows you to make changes to the frames and control which frames are displayed. You can select a single frame or multiple frames and right-click to perform many tasks:
 - **Create new frame** to create a new frame.
 - **Rename frame** to rename a frame.
 - **Copy frame** to create a copy of a frame.
 - **Drop frame** to drop a frame.
 - **Set as current working frame** to make the selected frame the working frame.
 - **Open Frames Manager** to open the Frames Manager dialog box.

- **Focus selected frame** to focus the selected frame.
 - **Show only selected frames** to display only the tab for the selected frames.
 - **Show only current working frame (CWF)** to display only the tab for the working frame, which may not be the selected frame.
 - **Show all frames** to display tabs for all frames.
 - **Hide selected frames** to remove the tab for the selected frames.
 - **Reorder tabs** to place tabs in the same order that they are listed in the Frames window. You can drag the tabs to change the order in which they are displayed.
 - **Select all** to select all frames in the Frames window.
- Tabs are not automatically created for all frames. To add a tab for a frame, check the checkbox next to the frame name in the Frames window. Or right-click in the Frames window and click on **Show all frames**.
 - Right-click on the frame tab to rename, copy, or drop the frame.
 - The frame tab will display an asterisk (*) if the data in the frame were modified but not saved.
 - While the Data Editor is open, at least one tab must remain visible. Therefore, if you hide all frames or if all frames that are visible are removed, the Data Editor will revert to show the current working frame.
 - When you work with multiple frames, dialog boxes opened from **Menu**  **> Data** and **Menu**  **> Tools** will show the frame name in the title bar of the dialog box. These dialog boxes will issue commands on the currently focused frame.
 - Copying and pasting can be done within a frame and between frames.
 - Snapshots are taken in the context of the currently focused frame. But snapshots taken in one frame can be restored in another frame.
 - Load a set of frames from disk by clicking on **Menu**  **> File > Frameset > Open....** With `frames save`, you can save a set of frames on disk, and with `frames use`, you can load the set of frames, allowing you to resume your work with multiple frames. Be mindful when loading a frameset in the Data Editor, because there might be a conflict between an existing frame and a frame of the same name in the frameset. The dialog box provides options for either clearing existing frames or replacing matching frames with frames on disk.

Stata, Stata Press, Mata, NetCourse, and NetCourseNow are registered trademarks of StataCorp LLC. Stata and Stata Press are registered trademarks with the World Intellectual Property Organization of the United Nations. StataNow is a trademark of StataCorp LLC. Other brand and product names are registered trademarks or trademarks of their respective companies. Copyright © 1985–2025 StataCorp LLC, College Station, TX, USA. All rights reserved.



For suggested citations, see the FAQ on [citing Stata documentation](#).